


ECP53CX-5

G.V.W (Gross Vehicle Weight)= 41.5ton

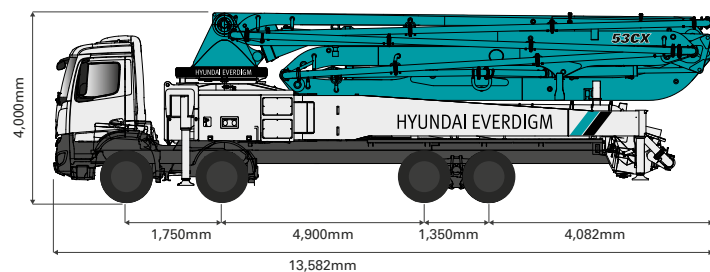

* Weight and dimension figures here are subject to change on various chassis option and additional axle application etc.


BOOM

Folding type	5-section RZ-folding
Max. vertical reach	52.2m
Max. horizontal reach	47.9m
Max. depth reach	38m
Unfolding height	11.5m
Slewing angle	360deg.
End hose length	3m
Delivery pipe dia.	125mm


PUMP

Pump cell	2116
Control system	Closed Free Flow Hydraulic
Main pump	A4VG125x2
Concrete cylinder(mm)	230x2,100
Concrete output(m³/h)	160
Concrete pressure(bar)	85
Strokes No.(per min.)	30
Transfer tube type	S-Tube, S2018(S2318)
Volume of hopper	600L

WORKING RANGE

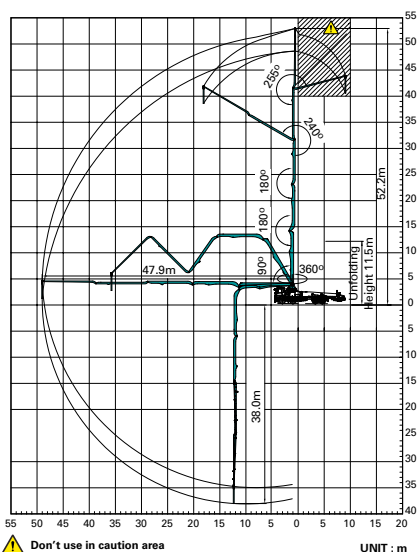

OUTRIGGER SPREAD




Front outrigger type X(Diagonal) Extension
Rear outrigger type Swing-out



ECP56CX-5

G.V.W (Gross Vehicle Weight)= 44ton

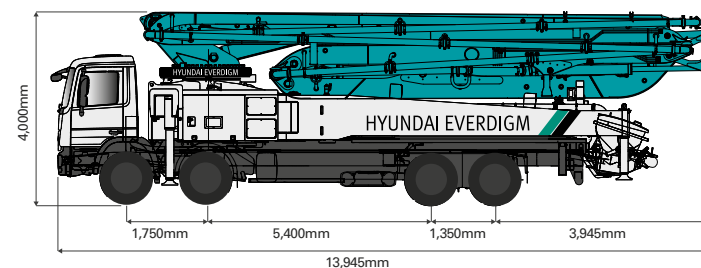

* Weight and dimension figures here are subject to change on various chassis option and additional axle application etc.


BOOM

Folding type	5-section RZ-folding
Max. vertical reach	55.2m
Max. horizontal reach	51.2m
Max. depth reach	40.1m
Unfolding height	12.2m
Slewing angle	360deg.
End hose length	3m
Delivery pipe dia.	125mm


PUMP

Pump cell	2116
Control system	Closed Free Flow Hydraulic
Main pump	A4VG125x2
Concrete cylinder(mm)	230x2,100
Concrete output(m³/h)	160
Concrete pressure(bar)	85
Strokes No.(per min.)	30
Transfer tube type	S-Tube, S2018(S2318)
Volume of hopper	600L

WORKING RANGE

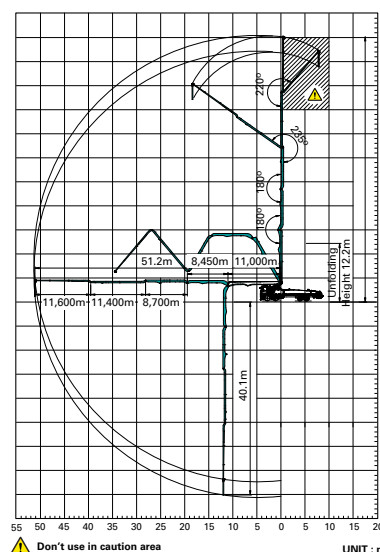

OUTRIGGER SPREAD



Front outrigger type X(Diagonal) Extension
Rear outrigger type Swing-out

